



Cleaning technology



Main catalogue 2016

CLEANCRAFT cleaning technology for professional users in trade and industry



Sales and service Germany in Hallstadt/Bamberg

Dear Customer,

Our aim is to facilitate your work.

When you purchase a CLEANCRAFT product, you can look forward to cleaning technology that will always meet your requirements in terms of ease of use, equipment level, quality and engineering. On top of this, the complete range of CLEANCRAFT products impresses with its extraordinary price-performance-ratio.

Thanks to our network of specialist retailers, you will always find a local partner happy to offer you advice, hands-on support and after-sales service.

And, of course, our team of experts is there to help you at any time.

Kilian Stürmer
Chief executive

Robert Stürmer
Head of Sales



The **STÜRMER Logistics Centre** with approx. 22,000 m² of storage space
More than 345,000 articles are available for delivery from stock at the **STÜRMER Logistics Centre**.
This allows for fast shipment of almost all of our products to Germany and throughout Europe.



Wet/dry vacuum cleaners

wetCAT series

wetCAT 116 E	8
wetCAT 137 E	8
wetCAT 133 IE	8
wetCAT 137 R	9
wetCAT 133 IR	9
wetCAT 262 ET	10
wetCAT 262 IET	10
wetCAT 362 ET	10
wetCAT 362 IET	10



Dry vacuum cleaner

dryCAT series

dryCAT 137 RSC	14
dryCAT 133 IRSC	14
dryCAT 133 IRSCA	14
dryCAT 137 RSCM	New 14
dryCAT 133 IRSCM	14
dryCAT 262 RSCT	15
dryCAT 262 IRSCT	15
dryCAT 362 RSCT-3	15
dryCAT 362 IRSCT-3	15



Special vacuum cleaners

Special vacuum cleaners – particularly quiet

flexCAT 112 Q	18
---------------	----

Special vacuum cleaners – portable

flexCAT 16 H	19
--------------	----

Special vacuum cleaner for cleaning upholstery/carpets

flexCAT 116 PD	New 20
----------------	---------------

Special vacuum cleaners with cleaning agent

flexCAT 262 IEPD	21
------------------	----

Special vacuum cleaners with a water pump

flexCAT 290 EPT	22
-----------------	----

Special vacuum cleaners with an oil trap

flexCAT 390 EOT	23
-----------------	----



Accessories

for wetCAT, dryCAT, flexCAT	24
-----------------------------	----

Benefits

➔ Your benefits at a glance:

A brief overview of some of the practical vacuum cleaner details that facilitate your work and guarantee safe application. See the respective pages for details of the equipment levels for the individual vacuum cleaners.



Break-proof nylon clips

The nylon clips used to fasten the head onto the tank are made of flexible, break-proof material. The nylon clips are perfectly protected against damage during regular use, emptying the tank, thanks to their flexible design. A safe and leak-tight joint between the head and the tank is thus guaranteed in the long term.



Appliance socket and automatic start-up

To be able to connect power tools to the vacuum, some models have an appliance socket. This removes the need to route two power supplies to the power tool. The R models additionally offer an automatic start-up feature. This switches on the vacuum cleaner automatically when the connected power tool is switched on. You can connect the suction hose to, e.g., a manual circular saw, and simply operate the saw when working – the vacuum starts up automatically.



Solid steel chassis

The solid steel chassis for models with a large tank guarantees safe transport of the vacuum cleaner over rough ground. Even when the tank is full, and the vacuum cleaner is thus heavy, it can be safely manoeuvred thanks to the stable chassis.



Practical holders

There are practical holders directly on the appliance for vacuum cleaners parts such as nozzles, the suction hose, or cables. This means that everything is always complete, and neatly stowed away.



Tilting mechanism

The integrated tilting mechanism in the chassis makes it easier to empty the full tank. Simply move the chassis to a position above the waste-disposal point, and tilt the full tank back using the additional handle on the underside.

Overview of model ranges – the optimum vacuum cleaner for any application

"wetCAT" series > Wet/dry vacuum cleaners	"dryCAT" series > Dry vacuum cleaners	"flexCAT" series > Special vacuum cleaners
<ul style="list-style-type: none"> ▶ Liquids ▶ Dust ▶ Solids 	<ul style="list-style-type: none"> ▶ Dust ▶ Solids ▶ Particulate matter 	<ul style="list-style-type: none"> ▶ Solids ▶ Liquids ▶ Special materials such as lubricating coolants, oils and chemical residues


The motors – why you need two or three motors

2- and 3-motor models

These models are equipped with separate on/off switches for each motor directly on the front of the vacuum cleaner. Depending on your requirements, you can select how many motors are running. This ensures the performance you need at any time, while also allowing for substantial energy savings.



Dust classes – as per DIN EN 60335-2-69, Annex AA

Dust class	Max. permeability	Suitable for	Applications
M 	< 0.1 %	<ul style="list-style-type: none"> ▶ Dusts with an OLV* $\geq 0.1 \text{ mg/m}^3$ ▶ Wood dusts up to max. 1200 W / 50 l 	<ul style="list-style-type: none"> ▶ Wood dusts (beech, oak) ▶ Paint dusts ▶ Ceramic dusts ▶ Dusts from plastics

* OLV = occupational limit value; this describes the maximum permissible concentration at the workplace (in mg/m^3) that is not hazardous to health.

The appliance names – what the individual designations mean

The most important equipment details are encoded in the appliance names

The power rating in figures:

In appliance names with a numeric combination, the first number stands for the number of motors; the second and third numbers give you the tank volume in litres.


Designations for the appliance type:

wetCAT	=	Wet/dry vacuum cleaners
dryCAT	=	Dry vacuum cleaner
flexCAT	=	Special vacuum cleaners

The abbreviations for the various equipment levels:

I	=	Stainless steel tank	C	=	Cartridge filter
W	=	Wet vacuum cleaner	T	=	Tilting mechanism
D	=	Dry vacuum cleaner	P	=	Water pump
E	=	Socket	A	=	Compressed air connection
R	=	Automatic start-up (including a socket)	D	=	Cleaning agent tank
S	=	Auto filter cleaning	3	=	3 Cartridge filters

Example: dryCAT 362 IRSCT-3

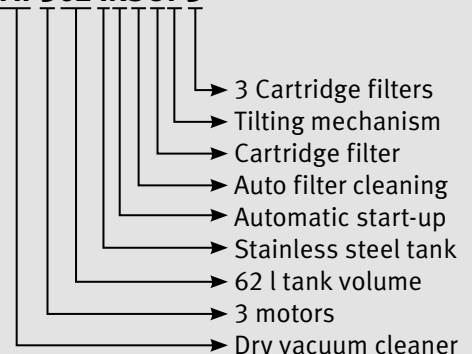

Wet/dry vacuum cleaners



Overview of wet/dry vacuum cleaners

Model	wetCAT 116 E	wetCAT 137 E	wetCAT 133 IE	wetCAT 137 R	wetCAT 133 IR
Article no.	7001120	7001130	7001135	7001140	7001145
Technical data					
Max. output	1300 W	1300 W	1300 W	1300 W	1300 W
Airflow	3333 l/min	3333 l/min	3333 l/min	3333 l/min	3333 l/min
Tank volume	16 l	37 l	33 l	37 l	33 l
Hose diameter/length	36 mm/2 m	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	1/single-stage	1/two-stage	1/two-stage	1/two-stage	1/two-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass	Bypass
Sound pressure level	71.2 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	8.5 m	8.5 m	8.5 m	8.5 m
Max. rating device socket outlet	2300 W	2300 W	2300 W	2300 W	2300 W
Negative pressure	238 mbar	247 mbar	247 mbar	247 mbar	247 mbar
Filter surface	1250 cm ²	1490 cm ²	1490 cm ²	1490 cm ²	1490 cm ²
Tank material	Plastic	Plastic	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H)	400 x 400 x 640 mm	390 x 390 x 900 mm	430 x 430 x 830 mm	390 x 390 x 900 mm	430 x 430 x 830 mm
Weight	10.4 kg	12.3 kg	15 kg	12.3 kg	15 kg
Features					
Motor circuit breaker	✓	✓	✓	✓	✓
Travel device	✓	✓	✓	✓	✓
Tilting mechanism	✗	✗	✗	✗	✗
Cartridge filter	✗	✗	✗	✗	✗
M Class vacuum cleaners	✗	✗	✗	✗	✗
Automatic filter cleaning	✗	✗	✗	✗	✗
Water pump	✗	✗	✗	✗	✗
Pump for cleaning agent	✗	✗	✗	✗	✗
Device socket	✓	✓	✓	✓	✓
Automatic start-up	✗	✗	✗	✓	✓
Compressed air connection	✗	✗	✗	✗	✗
Hose & nozzle set	✓	✓	✓	✓	✓
Cable holder	✓	✓	✓	✓	✓
Hose & nozzle holder	✓	✓	✓	✓	✓
Connection for electrically-driven cleaning brush	✗	✗	✗	✗	✗
Antistatic	✗	✗	✗	✗	✗

Model	wetCAT 262 ET	wetCAT 262 IET	wetCAT 362 ET	wetCAT 362 IET
Article no.	7001260	7001270	7001360	7001370
Technical data				
Max. output	2600 W	2600 W	3600 W	3600 W
Airflow	6666 l/min	6666 l/min	10000 l/min	10000 l/min
Tank volume	62 l	62 l	62 l	62 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	2/two-stage	2/two-stage	3/two-stage	3/two-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass
Sound pressure level	74.5 dB(A)	74.5 dB(A)	76 dB(A)	76 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	8.5 m	8.5 m	8.5 m
Max. rating device socket outlet	1150 W	1150 W	1000 W	1000 W
Negative pressure	247 mbar	247 mbar	247 mbar	247 mbar
Filter surface	3627 cm ²	3627 cm ²	3267 cm ²	3627 cm ²
Tank material	Plastic	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H)	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm
Weight	28 kg	21.9 kg	28 kg	21.9 kg
Features				
Motor circuit breaker	✓	✓	✓	✓
Travel device	✓	✓	✓	✓
Tilting mechanism	✓	✓	✓	✓
Cartridge filter	✗	✗	✗	✗
M Class vacuum cleaners	✗	✗	✗	✗
Automatic filter cleaning	✗	✗	✗	✗
Water pump	✗	✗	✗	✗
Pump for cleaning agent	✗	✗	✗	✗
Device socket	✓	✓	✓	✓
Automatic start-up	✗	✗	✗	✗
Compressed air connection	✗	✗	✗	✗
Hose & nozzle set	✓	✓	✓	✓
Cable holder	✓	✓	✓	✓
Hose & nozzle holder	✗	✗	✗	✗
Connection for electrically-driven cleaning brush	✗	✗	✗	✗
Antistatic	✗	✗	✗	✗

✓ included as standard equipment/ ✗ = not included as standard equipment

Wet/dry vacuum cleaners

wetCAT series wet/dry vacuum cleaners



- ▶ Wet/dry models for vacuuming liquids, swarf and other solid particles
- ▶ All motors equipped with copper windings and motor protection
- ▶ Two-stage motors (except wetCAT 116 E) for particularly demanding cleaning work and a long service life
- ▶ The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- ▶ 2-part pluggable suction tube made of plastic-sheathed aluminium. Very light and stable
- ▶ Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- ▶ Hose connection on container with locking mechanism prevents the hose coming loose during cleaning

- › Compact model
- › Integrated socket for connecting power tools



wetCAT 116 E



Model	wetCAT 116 E	wetCAT 137 E	wetCAT 133 IE
Article no.	7001120	7001130	7001135
Technical Data			
Vacuum cleaner type	wet & dry	wet & dry	wet & dry
Max. output	1300 W	1300 W	1300 W
Airflow	3333 l/min	3333 l/min	3333 l/min
Tank volume	16 l	37 l	33 l
Hose diameter/length	36 mm/2 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	1/single-stage	1/two-stage	1/two-stage
Motor cooling	Bypass	Bypass	Bypass
Sound pressure level	71.2 dB(A)	72 dB(A)	72 dB(A)
Mains frequency	~50 Hz	~50 Hz	~50 Hz
Electrical voltage	230 V	230 V	230 V
Cable length	8.5 m	8.5 m	8.5 m
Negative pressure	238 mbar	247 mbar	247 mbar
Tank material	Plastic	Plastic	Stainless steel
Dimensions (L x W x H)	400 x 400 x 640 mm	390 x 390 x 900 mm	430 x 430 x 830 mm
Weight	10.4 kg	12.3 kg	15 kg



wetCAT 116 E scope of delivery:

- › Suction hose 2 m, handle with loss-air control, pluggable suction tube, floor attachment with fold-away brush, furniture nozzle, round nozzle with brush, flat nozzle, nanotech filter

› Accessories page 25

- Ergonomic head design with cable hooks
- Suction motors with noise damping to ensure quiet operation

► R models: Automatic start-up on switching on a connected power tool



wetCAT 137 R



Floatation switch for safe stop for full tank in wet vacuuming



Nanotech filter "SANI" prevents bacteria, mould and micro-parasites



Break-proof nylon clips for fastening the head on the tank



Plastic chassis and holders for nozzles and suction tube

Model	wetCAT 137 R	wetCAT 133 IR
Article no.	7001140	7001145

Technical Data		
Vacuum cleaner type	wet & dry	wet & dry
Max. output	1300 W	1300 W
Airflow	3333 l/min	3333 l/min
Tank volume	37 l	33 l
Hose diameter/length	38 mm/4 m	38 mm/4 m
Number of motors/output stages	1/two-stage	1/two-stage
Motor cooling	Bypass	Bypass
Sound pressure level	72 dB(A)	72 dB(A)
Mains frequency	~50 Hz	~50 Hz
Electrical voltage	230 V	230 V
Cable length	8.5 m	8.5 m
Negative pressure	247 mbar	247 mbar
Tank material	Plastic	Stainless steel
Dimensions (L x W x H)	390 x 390 x 900 mm	430 x 430 x 830 mm
Weight	12.3 kg	15 kg



Scope of supply wetCAT 137 E through wetCAT 133 IR:

- Suction hose 4 m, handle with loss-air control, pluggable suction tube, dry floor attachment, wet floor attachment, round nozzle with brush, flat nozzle, reduction piece, nanotech filter

► Accessories start on page 26

Wet/dry vacuum cleaners

wetCAT series wet/dry vacuum cleaners



- ▶ Wet/dry models for vacuuming liquids, swarf and other solid particles
- ▶ All motors equipped with copper windings and motor protection
- ▶ Two-stage motors for particularly demanding cleaning work and a long service life
- ▶ The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- ▶ 2-part pluggable suction tube made of plastic-sheathed aluminium. Very light and stable
- ▶ Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- ▶ Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- ▶ Ergonomic head design with cable hooks

- › Solid steel chassis with push handle
- › Practical tilting mechanism
- › Integrated socket for connecting power tools



wetCAT 262 IET



Model	wetCAT 262 ET	wetCAT 262 IET	wetCAT 362 ET	wetCAT 362 IET
Article no.	7001260	7001270	7001360	7001370

Technical Data				
Vacuum cleaner type	wet & dry	wet & dry	wet & dry	wet & dry
Max. output	2600 W	2600 W	3600 W	3600 W
Airflow	6666 l/min	6666 l/min	10000 l/min	10000 l/min
Tank volume	62 l	62 l	62 l	62 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	2/two-stage	2/two-stage	3/two-stage	3/two-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass
Sound pressure level	74.5 dB(A)	74.5 dB(A)	76 dB(A)	76 dB(A)
Mains frequency	~50 Hz	~50 Hz	~50 Hz	~50 Hz
Electrical voltage	230 V	230 V	230 V	230 V
Cable length	8.5 m	8.5 m	8.5 m	8.5 m
Negative pressure	247 mbar	247 mbar	247 mbar	247 mbar
Tank material	Plastic	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H)	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm
Weight	28 kg	21.9 kg	28 kg	21.9 kg

- Suction motors with noise damping to ensure quiet operation
- 2- and 3-motor models with separate on/off switches. The operator can choose how many motors to work with. This allows for substantial energy savings

- Models with plastic or stainless steel tanks
- Integrated socket for connecting power tools



wetCAT 362 ET



**Scope of supply
wetCAT 262 ET through
wetCAT 362 IET:**

- Suction hose 4 m
- Handle with loss-air control
- Pluggable suction tube
- Dry floor attachment
- Wet floor attachment
- Round nozzle with brush
- Flat nozzle
- Reduction piece
- Nanotech filter

► Accessories page 29



Floatation switch for safe stop
for full tank in wet vacuuming



Nanotech filter "SANI" prevents
bacteria, mould and micro-
parasites



Tilting mechanism for easy
emptying



Solid steel chassis



Break-proof nylon clips for
fastening the head on the tank

Dry vacuum cleaner



Overview of dry vacuum cleaners

Model	dryCAT 137 RSC	dryCAT 133 IRSC	dryCAT 133 IRSCA	dryCAT 137 RSCM	dryCAT 133 IRSCM
Article no.	7002130	7002135	7002140	7002150	7002145
Technical data					
Max. output	1300 W	1300 W	1300 W	1300 W	1300 W
Airflow	3333 l/min	3333 l/min	3333 l/min	3333 l/min	3333 l/min
Tank volume	37 l	33 l	33 l	37 l	33 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	1/two-stage	1/two-stage	1/two-stage	1/two-stage	1/two-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass	Bypass
Sound pressure level	72 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	8.5 m	8.5 m	8.5 m	8.5 m
Max. rating device socket outlet	2300 W	2300 W	2300 W	2300 W	2300 W
Negative pressure	223 mbar	223 mbar	223 mbar	223 mbar	223 mbar
Filter surface	5000 cm ²	5000 cm ²	5000 cm ²	5000 cm ²	5000 cm ²
Tank material	Plastic	Stainless steel	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H)	390 x 390 x 900 mm	430 x 430 x 830 mm	430 x 430 x 830 mm	390 x 390 x 900 mm	430 x 430 x 830 mm
Weight	14.3 kg	13.8 kg	13.5 kg	15 kg	15 kg
Features					
Motor circuit breaker	✓	✓	✓	✓	✓
Travel device	✓	✓	✓	✓	✓
Tilting mechanism	✗	✗	✗	✗	✗
Cartridge filter	✓	✓	✓	✓	✓
M Class vacuum cleaners	✗	✗	✗	✓	✓
Automatic filter cleaning	✓	✓	✓	✓	✓
Water pump	✗	✗	✗	✗	✗
Pump for cleaning agent	✗	✗	✗	✗	✗
Device socket	✓	✓	✓	✓	✓
Automatic start-up	✓	✓	✓	✓	✓
Compressed air connection	✗	✗	✓	✗	✗
Hose & nozzle set	✓	✓	✓	✓	✓
Cable holder	✓	✓	✓	✓	✓
Hose & nozzle holder	✓	✓	✓	✓	✓
Connection for electrically-driven cleaning brush	✗	✗	✗	✗	✗
Antistatic	✗	✗	✗	✓	✓

Model	dryCAT 262 RSCT	dryCAT 262 IRSCT	dryCAT 362 RSCT-3	dryCAT 362 IRSCT-3
Article no.	7002260	7002270	7002360	7002370
Technical data				
Max. output	2600 W	2600 W	3000 W	3000 W
Airflow	6666 l/min	6666 l/min	7933 l/min	7933 l/min
Tank volume	62 l	62 l	62 l	62 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	2/two-stage	2/two-stage	3/single-stage	3/single-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass
Sound pressure level	74.5 dB(A)	74.5 dB(A)	76 dB(A)	76 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	8.5 m	8.5 m	8.5 m
Max. rating device socket outlet	1300 W	1300 W	800 W	800 W
Negative pressure	223 mbar	223 mbar	256 mbar	256 mbar
Filter surface	3627 cm ²	3627 cm ²	3240 cm ²	3240 cm ²
Tank material	Plastic	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H)	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm
Weight	28 kg	28 kg	31.5 kg	31.6 kg
Features				
Motor circuit breaker	✓	✓	✓	✓
Travel device	✓	✓	✓	✓
Tilting mechanism	✓	✓	✓	✓
Cartridge filter	✓	✓	✓	✓
M Class vacuum cleaners	✗	✗	✗	✗
Automatic filter cleaning	✓	✓	✓	✓
Water pump	✗	✗	✗	✗
Pump for cleaning agent	✗	✗	✗	✗
Device socket	✓	✓	✓	✓
Automatic start-up	✓	✓	✓	✓
Compressed air connection	✗	✗	✗	✗
Hose & nozzle set	✓	✓	✓	✓
Cable holder	✓	✓	✓	✓
Hose & nozzle holder	✗	✗	✗	✗
Connection for electrically-driven cleaning brush	✗	✗	✗	✗
Antistatic	✗	✗	✓	✓

✓ included as standard equipment/ ✗ = not included as standard equipment

Wet/dry vacuum cleaner

Dry vacuum cleaner

Special vacuum cleaners

Accessories

Dry vacuum cleaner

dryCAT series – dry vacuum cleaners



- ▶ Dry vacuum cleaner models for dust and other solid particulate matter
- ▶ Two-stage motors equipped with copper windings and motor protection. Suitable for particularly demanding cleaning work and a long service life
- ▶ Cartridge filter with an extremely large

- filter surface ensures constant vacuuming performance
- ▶ The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- ▶ 2-part pluggable suction tube made of plastic-sheathed aluminium. Very light and stable

- ▶ Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- ▶ Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- ▶ Ergonomic head design with cable hooks



Automatic filter cleaning vibration on switching off the connected power tool, and switch for manual cleaning vibration



Break-proof nylon clips for fastening the head on the tank



Plastic chassis and holders for nozzles and suction tube (dryCAT 137 RSC through to dryCAT 133 IRSCM)

- ▶ Automatic filter cleaning
- ▶ With automatic start-up on switching on a connected power tool
- ▶ Integrated socket for connecting power tools

- ▶ dryCAT 133 IRSCA: compressed air connection
- ▶ dryCAT 133 IRSCM: complies with the standard for M Class vacuum cleaners



dryCAT 133 IRSCM



Model	dryCAT 137 RSC	dryCAT 133 IRSC	dryCAT 133 IRSCA	dryCAT 137 RSCM	dryCAT 133 IRSCM
Article no.	7002130	7002135	7002140	7002150	7002145

Technical Data					
Vacuum cleaner type	dry	dry	dry	dry	dry
Max. output	1300 W	1300 W	1300 W	1300 W	1300 W
Airflow	3333 l/min	3333 l/min	3333 l/min	3333 l/min	3333 l/min
Tank volume	37 l	33 l	33 l	37 l	33 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	1/two-stage	1/two-stage	1/two-stage	1/two-stage	1/two-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass	Bypass
Sound pressure level	72 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)	72 dB(A)
Mains frequency	~50 Hz	~50 Hz	~50 Hz	~50 Hz	~50 Hz
Electrical voltage	230 V	230 V	230 V	230 V	230 V
Cable length	8.5 m	8.5 m	8.5 m	8.5 m	8.5 m
Negative pressure	223 mbar	223 mbar	223 mbar	223 mbar	223 mbar
Tank material	Plastic	Stainless steel	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H) in mm	390 x 390 x 900	430 x 430 x 830	430 x 430 x 830	390 x 390 x 900	430 x 430 x 830
Weight	14.3 kg	13.8 kg	13.5 kg	15 kg	15 kg



Scope of supply dryCAT 137 RSC through dryCAT 262 IRSC:

- ▶ Suction hose 4 m, handle with loss-air control, pluggable suction tube, dry floor attachment, round nozzle with brush, flat nozzle, reduction piece, cartridge filter

▶ Accessories page 30/31

- 2- and 3-motor models with separate on/off switches. The operator can choose how many motors to work with. This allows for substantial energy savings
- Suction motors with noise damping to ensure quiet operation
- **dryCAT 362 RSCT-3 and dryCAT 362 IRSCT-3:** designed for continuous operation. Three

motors with one cartridge filter each. The vacuum cleaner works cyclically with two motors and filters, while the third filter is cleaned during operation. Thanks to the automatic cycle, all filters are cleaned while the vacuum cleaner continues to work without interruption, and without compromising on suction performance.

dryCAT 262 RSCT through to dryCAT 362 IRSCT-3:

- › Solid steel chassis with push handle
- › Practical tilting mechanism
- › dryCAT 362 RSCT-3 / dryCAT 362 IRSCT-3 with 3-filter cleaning



dryCAT 362 RSCT-3



Model	dryCAT 262 RSCT	dryCAT 262 IRSCT	dryCAT 362 RSCT-3	dryCAT 362 IRSCT-3
Article no.	7002260	7002270	7002360	7002370

Technical Data				
Vacuum cleaner type	dry	dry	dry	dry
Max. output	2600 W	2600 W	3000 W	3000 W
Airflow	6666 l/min	6666 l/min	7933 l/min	7933 l/min
Tank volume	62 l	62 l	62 l	62 l
Hose diameter/length	38 mm/4 m	38 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	2/two-stage	2/two-stage	3/single-stage	3/single-stage
Motor cooling	Bypass	Bypass	Bypass	Bypass
Sound pressure level	74.5 dB(A)	74.5 dB(A)	76 dB(A)	76 dB(A)
Mains frequency	~50 Hz	~50 Hz	~50 Hz	~50 Hz
Electrical voltage	230 V	230 V	230 V	230 V
Cable length	8.5 m	8.5 m	8.5 m	8.5 m
Negative pressure	223 mbar	223 mbar	256 mbar	256 mbar
Tank material	Plastic	Stainless steel	Plastic	Stainless steel
Dimensions (L x W x H) in mm	570 x 700 x 1140	570 x 700 x 1140	570 x 700 x 1140	570 x 700 x 1140
Weight	28 kg	28 kg	31.5 kg	31.6 kg




Solid steel chassis (models with 62 l tank)



Tilting mechanism for easy emptying (62 l models)



3-filter cleaning for dryCAT 362 RSCT-3 / dryCAT 362 IRSCT-3



3-filter cleaning: the air intake is designed tangentially to support the cyclone effect (dust pre-separation)



Scope of supply dryCAT 362 RSCT-3 / 362 IRSCT-3:

- › Suction hose 4 m, pluggable suction tube (steel) dry floor attachment, round nozzle with brush, flat nozzle, reduction piece, 3 cartridge filters

› Accessories page 31

Special vacuum cleaners

Dry vacuum cleaner

Special vacuum cleaner for cleaning upholstery/carpets

Special vacuum cleaners with cleaning agent

Special vacuum cleaners with an integrated water pump

Special vacuum cleaners with an oil trap



Special vacuum cleaners, overview

Model	flexCAT 112 Q	flexCAT 16 H	flexCAT 116 PD
Article no.	7003120	7003110	7003265
Technical data			
Vacuum cleaner type	dry	dry	wet & dry
Max. output	1300 W	1200 W	1200 W
Airflow	3500 l/min	1800 l/min	3583 l/min
Tank volume	12.5 l	6 l	16 l
Hose diameter/length	36 mm/2 m	35 mm/1 m	36 mm/2 m
Number of motors/output stages	1/single-stage	1/single-stage	1/two-stage
Motor cooling	Flow rate	Flow rate	Bypass
Sound pressure level	57 dB(A)	72.6 dB(A)	73.4 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	4.5 m	8.5 m
Negative pressure	287 mbar	194 mbar	245 mbar
Filter surface	2300 cm ²	-	1250 cm ²
Tank material	Plastic	Plastic	Plastic
Dimensions (L x W x H)	400 x 400 x 510 mm	290 x 240 x 430 mm	390 x 370 x 500 mm
Weight	9 kg	4 kg	11 kg
Features			
Motor circuit breaker	✗	✗	✗
Travel device	✓	✗	✓
Tilting mechanism	✗	✗	✓
Cartridge filter	✓	✓	✗
M Class vacuum cleaners	✗	✗	✗
Automatic filter cleaning	✗	✗	✗
Water pump	✗	✗	✓
Pump for cleaning agent	✗	✗	✗
Device socket	✗	✗	✓
Automatic start-up	✗	✗	✗
Compressed air connection	✗	✗	✗
Hose & nozzle set	✓	✓	✓
Cable holder	✗	✓	✓
Hose & nozzle holder	✓	✓	✗
Connection for electrically-driven cleaning brush	✗	✗	✗
Antistatic	✗	✗	✗

Model	flexCAT 262 IEPD	flexCAT 290 EPT	flexCAT 390 EOT
Article no.	7003270	7003290	7003390
Technical data			
Vacuum cleaner type	wet & dry	wet & dry	wet & dry
Max. output	2400 W	2400 W	3500 W
Airflow	7000 l/min	7000 l/min	10750 l/min
Tank volume	62 l	90 l	90 l
Hose diameter/length	40 mm/4 m	38 mm/4 m	38 mm/4 m
Number of motors/output stages	2/two-stage	2/two-stage	3/two-stage
Motor cooling	Bypass	Bypass	Bypass
Sound pressure level	74.5 dB(A)	74.5 dB(A)	76 dB(A)
Electrical connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Cable length	8.5 m	8.5 m	8.5 m
Max. power rating device outlet sockets	-	1300 W	1000 W
Cleaning tank content	25 l	-	-
Cleaning pump performance	0.8 l/min	-	-
Water pump performance	-	180 l/min	-
Water hose connection diameter	-	Ø 30 mm	-
Negative pressure	247 mbar	247 mbar	250 mbar
Filter surface	3627 cm ²	-	3000 cm ²
Tank material	Stainless steel	Polyethylene	Polyethylene
Dimensions (L x W x H)	580 x 740 x 930 mm	570 x 700 x 1140 mm	570 x 700 x 1140 mm
Weight	31.9 kg	33 kg	38.8 kg
Features			
Motor circuit breaker	✓	✓	✓
Travel device	✓	✓	✓
Tilting mechanism	✗	✓	✓
Cartridge filter	✗	✗	✗
M Class vacuum cleaners	✗	✗	✗
Automatic filter cleaning	✗	✗	✗
Water pump	✗	✓	✗
Pump for cleaning agent	✓	✗	✗
Device socket	✗	✓	✓
Automatic start-up	✗	✗	✗
Compressed air connection	✗	✗	✗
Hose & nozzle set	✓	✓	✓
Cable holder	✓	✓	✓
Hose & nozzle holder	✗	✗	✗
Connection for electrically-driven cleaning brush	✓	✗	✗
Antistatic	✗	✗	✓

✓ included as standard equipment/ ✗ = not included as standard equipment

Wet/dry vacuum cleaners

Dry vacuum cleaner

Special vacuum cleaners

Accessories

Special vacuum cleaners

flexCAT 112 Q – Extremely quiet special vacuum cleaner with powerful vacuuming performance. The ideal vacuum cleaner for homes, offices and catering.



- Dry vacuum cleaner for applications that require maximum efficiency and very quiet operation
- Very easy to stow away thanks to small size and footprint
- 2-part pluggable suction tube made of plastic-sheathed aluminium. Very light and stable
- Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- Break-proof nylon clips for fastening the head on the tank
- Threaded hose connection on container with locking mechanism prevents the hose coming loose during cleaning



Low-noise rubber wheels



Holder for nozzles and hose pipe



- Great efficiency and very quiet in operation
- Small and handy design
- Cartridge filter with an extremely large filter surface ensures constant vacuuming performance



Model	flexCAT 112 Q
Article no.	7003120

Technical Data	
Vacuum cleaner type	dry
Max. output	1300 W
Airflow	3500 l/min
Tank volume	12.5 l
Hose diameter/length	36 mm/2 m
Number of motors/output stages	1/single-stage
Motor cooling	Flow rate
Sound pressure level	57 dB(A)
Mains frequency	~50 Hz
Electrical voltage	230 V
Cable length	8.5 m
Negative pressure	287 mbar
Tank material	Plastic
Dimensions (L x W x H)	400 x 400 x 510 mm
Weight	9 kg



Scope of supply:


- Suction hose 2 m
- Handle with loss-air control
- Pluggable suction tube
- Floor attachment with fold-up brush
- Furniture nozzle
- Round nozzle with brush
- Gap nozzle
- Cartridge filter

► Accessories page 33

flexCAT 16 H – portable special vacuum cleaner

- Very light and compact dry vacuum cleaner
- Portable during cleaning thanks to shoulder strap
- Impresses with ease of handling in narrow and hard-to-access vacuum cleaning locations
- Cartridge filter with a very large filter surface and "Easy Push" filter cleaning, ensure constant vacuuming performance
- Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- Holders for hose and nozzles

- › Very handy and compact
- › Portable thanks to shoulder strap
- › Cartridge filter with "Easy Push" filter cleaning

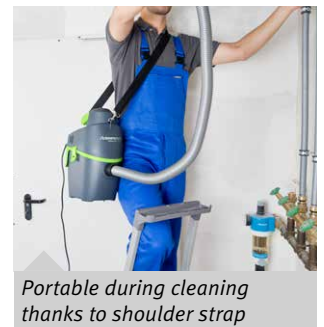

Model	flexCAT 16 H
Article no.	7003110

Technical Data	
Vacuum cleaner type	dry
Max. output	1200 W
Airflow	1800 l/min
Tank volume	6 l
Hose diameter/length	35 mm/1 m
Number of motors/output stages	1/single-stage
Motor cooling	Flow rate
Sound pressure level	72.6 dB(A)
Mains frequency	~50 Hz
Electrical voltage	230 V
Cable length	4.5 m
Negative pressure	194 mbar
Tank material	Plastic
Dimensions (L x W x H)	290 x 240 x 430 mm
Weight	4 kg



Scope of supply:

- › Suction hose 1 m
- › Handle with loss-air control
- › Round nozzle with brush
- › Gap nozzle
- › Shoulder strap
- › Cartridge filter

› Accessories page 33

Special vacuum cleaners

New

flexCAT 116 PD – compact special-purpose vacuum cleaner with cleaning agent tank, upholstery, carpet and floor cleaning nozzles for cleaning carpets, upholstery and smooth floors



- ▶ Carpet and floor cleaning nozzle for carpets and smooth floors
- ▶ Upholstery cleaning nozzle for furniture and car upholstery
- ▶ Floor attachment with folding brush for dry vacuuming of smooth floors or carpets
- ▶ Polyethylene cleaning agent tank and plastic grey-water tank
- ▶ The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- ▶ 2-part pluggable suction tube (made of plastic-sheathed aluminium). Very light and stable
- ▶ Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- ▶ Nanotech filter "SANI" prevents bacteria, mould and micro-parasites
- ▶ Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- ▶ Vacuuming motor with noise damping to ensure quiet operation



Furniture cleaning nozzle with metering lever for cleaning agent



Carpet and floor cleaning nozzle for carpets and smooth floors



- › Compact model
- › Cleaning agent tank
- › Carpet and floor cleaning nozzle
- › Upholstery cleaning nozzle
- › Floor attachment with fold-up brush

Model	flexCAT 116 PD
Article no.	7003265

Technical Data	
Vacuum cleaner type	wet & dry
Max. output	1200 W
Airflow	3583 l/min
Tank volume	16 l
Hose diameter/length	36 mm/2 m
Number of motors/output stages	1/two-stage
Motor cooling	Bypass
Sound pressure level	73.4 dB(A)
Mains frequency	~50 Hz
Electrical voltage	230 V
Cable length	8.5 m
Negative pressure	245 mbar
Tank material	Plastic
Dimensions (L x W x H)	390 x 370 x 500 mm
Weight	11 kg



- Scope of supply:**
- › Suction hose 2 m
 - › Handle with loss-air control
 - › Pluggable suction tube
 - › Floor attachment with fold-up brush
 - › Gap nozzle
 - › Furniture nozzle
 - › Round nozzle with brush
 - › Upholstery cleaning nozzle
 - › Carpet and floor cleaning nozzle
 - › Nanotech filter

› Accessories page 34

flexCAT 262 IEPD – Special vacuum cleaner with cleaning agent tank and furniture nozzle for use in upholstery and automotive cleaning

- Suitable for cleaning seat cushions (automotive cleaning)
- Furniture nozzle with metering lever for cleaning agent
- Polyethylene cleaning agent tank and stainless steel grey-water tank
- The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- 2-part pluggable suction tube (made of plastic-sheathed aluminium). Very light and stable
- Two-stage motors equipped with copper windings and motor protection. Suitable for particularly demanding cleaning work and a long service life
- Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- Floatation switch for safe stop for full tank in wet vacuuming
- Nanotech filter "SANI" prevents bacteria, mould and micro-parasites
- Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- Suction motors with noise damping to ensure quiet operation
- Two motors with separate on/off switches. The operator can choose how many motors to work with. This allows for substantial energy savings



Furniture nozzle with metering lever for cleaning agent



Drain hose for easy emptying of the tank



Break-proof nylon clips for fastening the head on the tank



Connection for electrically-driven cleaning brush

- Cleaning agent tank
- Electromagnetic cleaning agent pump
- Stable plastic chassis with push handle
- Connection for electrically-driven cleaning brush



Model	flexCAT 262 IEPD
Article no.	7003270

Technical Data	
Vacuum cleaner type	wet & dry
Max. output	2400 W
Airflow	7000 l/min
Tank volume	62 l
Hose diameter/length	40 mm/4 m
Number of motors/output stages	2/two-stage
Motor cooling	Bypass
Sound pressure level	74.5 dB(A)
Mains frequency	~50 Hz
Electrical connection	230 V
Cable length	8.5 m
Negative pressure	247 mbar
Tank material	Stainless steel
Dimensions (L x W x H)	580 x 740 x 930 mm
Weight	31.9 kg



Scope of supply:

- Suction hose 4 m, handle with loss-air control, pluggable suction tube, wet floor attachment, flat nozzle, reduction piece, furniture cleaning nozzle with special hose 2 m, nanotech filter

► Accessories page 35

Special vacuum cleaners

flexCAT 290 EPT – Special vacuum cleaner with integrated water pump for fast, easy and continuous vacuuming and pumping off of liquids



- ▶ Motors equipped with copper windings and motor protection
- ▶ Two-stage motors for particularly demanding cleaning work and a long service life
- ▶ The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- ▶ 2-part pluggable suction tube made of plastic-sheathed aluminium. Very light and stable
- ▶ Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- ▶ Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- ▶ Ergonomic head design with cable hooks
- ▶ Floatation switch for safe stop for full tank in wet vacuuming
- ▶ Suction motors with noise damping to ensure quiet operation
- ▶ Two motors with separate on/off switches. The operator can choose how many motors to work with. This allows for substantial energy savings



Solid steel chassis & tilting mechanism for easy emptying



Hose connection (Ø 30 mm) for water pump



Integrated water pump

- › Integrated water pump for continuous vacuuming of large volumes of liquids
- › Solid steel chassis with push handle
- › Tilting mechanism
- › Two motors with separate on/off switches.
- › Integrated socket for connecting power tools



Model	flexCAT 290 EPT
Article no.	7003290

Technical Data	
Vacuum cleaner type	wet & dry
Max. output	2400 W
Airflow	7000 l/min
Tank volume	90 l
Hose diameter/length	38 mm/4 m
Number of motors/output stages	2/two-stage
Motor cooling	Bypass
Sound pressure level	74.5 dB(A)
Mains frequency	~50 Hz
Electrical voltage	230 V
Cable length	8.5 m
Negative pressure	247 mbar
Tank material	Polyethylene
Dimensions (L x W x H)	570 x 700 x 1140 mm
Weight	33 kg



Scope of supply:

- › Suction hose 4 m
- › Handle with loss-air control
- › Pluggable suction tube
- › Wet floor attachment

› Accessories page 35

flexCAT 390 EOT – Special vacuum cleaner with oil trap for extracting cooling lubricants, liquids with a high oil content, and metal swarf



- Designed for vacuuming liquids, swarf and other solid particles, e.g., for extracting cooling lubricants, liquids with a high oil content, and metal swarf
- A separation tank with an integrated oil trap is located between the tank and the head
- Motors equipped with copper windings and motor protection
- For particularly demanding cleaning work and a long service life
- The special seal between the head and the tank is resistant against oil and chemical residues without compromising on flexibility
- Elastic and flexible suction hose resilient to heavy loads and any kind of twisting
- Hose connection on container with locking mechanism prevents the hose coming loose during cleaning
- Ergonomic head design with cable hooks
- Floatation switch for safe stop for full tank in wet vacuuming
- Suction motors with noise damping to ensure quiet operation
- Three motors with separate on/off switches. The operator can choose how many motors to work with. This allows for substantial energy savings

- › Features an oil trap for extracting metal swarf and oil emulsions, e.g., for extracting cooling lubricants, liquids with a high oil content, and metal swarf
- › Integrated socket for connecting power tools
- › Tilting mechanism



Solid steel chassis with push handle



Tilting mechanism for easy emptying



Break-proof nylon clips for fastening the head on the tank

Model	flexCAT 390 EOT
Article no.	7003390

Technical Data	
Vacuum cleaner type	wet & dry
Max. output	3500 W
Airflow	10750 l/min
Tank volume	90 l
Hose diameter/length	38 mm/4 m
Number of motors/output stages	3/two-stage
Motor cooling	Bypass
Sound pressure level	76 dB(A)
Mains frequency	~50 Hz
Electrical connection	230 V
Cable length	8.5 m
Negative pressure	250 mbar
Tank material	Polyethylene
Dimensions (L x W x H)	570 x 700 x 1140 mm
Weight	38.8 kg



Scope of supply:

- › Suction hose 4 m
- › Floatation housing with mesh filter
- › Oil trap with fastening cap
- › Chrome-plated, pluggable steel suction tube
- › Wet floor attachment
- › Chrome-plated steel flat nozzle
- › Oil-resistant special suction hose 3 m

› Accessories page 35

Overview of accessories for wetCat series



Filter	Art. no.	wetCAT 116E	wetCAT 137 E	wetCAT 133 IE	wetCAT 137 R	wetCAT 133 IR	wetCAT 262ET	wetCAT 262 IET	wetCAT 362ET	wetCAT 362 IET
Filter bags	7010252	✓	✗	✗	✗	✗	✗	✗	✗	✗
Filter bags	7010253	✗	✓	✓	✓	✓	✗	✗	✗	✗
Filter bags	7010254	✗	✗	✗	✗	✗	✓	✓	✓	✓
Paper filter bag	7010100	✓	✗	✗	✗	✗	✗	✗	✗	✗
Paper filter bag	7010101	✗	✓	✓	✓	✓	✗	✗	✗	✗
Paper filter bag	7010105	✗	✗	✗	✗	✗	✓	✓	✓	✓
Polycarbon pre-filter	7010102	✗	✓	✓	✓	✓	✗	✗	✗	✗
Polycarbon pre-filter	7010106	✗	✗	✗	✗	✗	✓	✓	✓	✓
Polyester filters	7013023	✓	✗	✗	✗	✗	✗	✗	✗	✗
Paper cartridge filter	7010107	✗	✗	✗	✗	✗	✓	✓	✓	✓
Poly-cartridge filter	7010108	✗	✗	✗	✗	✗	✓	✓	✓	✓
HEPA Cartridge filter	7010109	✗	✗	✗	✗	✗	✓	✓	✓	✓
Pre-filter/Sanifilter complete kit	7013010	✓	✗	✗	✗	✗	✗	✗	✗	✗
Pre-filter/Sanifilter	7013011	✓	✗	✗	✗	✗	✗	✗	✗	✗
Pre-filter/Sanifilter complete kit	7013070	✗	✓	✓	✓	✓	✗	✗	✗	✗
Pre-filter/Sanifilter	7013071	✗	✓	✓	✓	✓	✗	✗	✗	✗
Pre-filter/Sanifilter complete kit	7013080	✗	✗	✗	✗	✗	✓	✓	✓	✓
Pre-filter/Sanifilter	7013081	✗	✗	✗	✗	✗	✓	✓	✓	✓











Nozzles & brushes	Art. no.	wetCAT 116E	wetCAT 137 E	wetCAT 133 IE	wetCAT 137 R	wetCAT 133 IR	wetCAT 262ET	wetCAT 262 IET	wetCAT 362ET	wetCAT 362 IET
Carpet brush	7010000	✗	✓	✓	✓	✓	✓	✓	✓	✓
Round brush	7013018	✓	✗	✗	✗	✗	✗	✗	✗	✗
Round brush	7013043	✗	✓	✓	✓	✓	✓	✓	✓	✓
Furniture nozzle	7013000	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flat nozzle Ø 36	7013001	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flat nozzle Ø 38	7013044	✗	✓	✓	✓	✓	✓	✓	✓	✓
Floor attachment with wet, dry and carpet inserts	7013012	✓	✗	✗	✗	✗	✗	✗	✗	✗
Wet floor attachment	7013040	✗	✓	✓	✓	✓	✓	✓	✓	✓
Dry floor attachment	7013041	✗	✓	✓	✓	✓	✓	✓	✓	✓
Fixed floor attachment	7013082	✗	✗	✗	✗	✗	✓	✓	✓	✓
Carpet insert for floor attachment	7013013	✓	✗	✗	✗	✗	✗	✗	✗	✗
Insert with rubber lip for floor attachment	7013014	✓	✗	✗	✗	✗	✗	✗	✗	✗
Hard rubber insert for floor attachment	7013015	✓	✗	✗	✗	✗	✗	✗	✗	✗
Combined attachment with fold-up brush	7013016	✓	✗	✗	✗	✗	✗	✗	✗	✗
Angled piece for floor attachment	7013042	✗	✓	✓	✓	✓	✓	✓	✓	✓

Adapters/Hoses/Tubes/Fasteners	Art. no.	wetCAT 116E	wetCAT 137 E	wetCAT 133 IE	wetCAT 137 R	wetCAT 133 IR	wetCAT 262ET	wetCAT 262 IET	wetCAT 362ET	wetCAT 362 IET
Fastening ring and seal for cartridge filter	7010110	✗	✗	✗	✗	✗	✓	✓	✓	✓
Hose Ø 32 mm / Coil 20 m	7013021	✓	✗	✗	✗	✗	✗	✗	✗	✗
Hose Ø 32 mm / 2.0 m with connections	7013022	✓	✗	✗	✗	✗	✗	✗	✗	✗
Hose Ø 38 mm / Coil 20 m	7013051	✗	✓	✓	✓	✓	✓	✓	✓	✓
Hose Ø 38 mm / 4.0 m with connections	7013052	✗	✓	✓	✓	✓	✓	✓	✓	✓
Suction pipe Ø 36 alum./plast. 0.5 m	7013017	✓	✗	✗	✗	✗	✗	✗	✗	✗
Suction pipe Ø 38 alum./plast. 0.5 m	7013045	✗	✓	✓	✓	✓	✓	✓	✓	✓
Handle with loss-air control	7013019	✓	✗	✗	✗	✗	✗	✗	✗	✗
Handle with loss-air control	7013048	✗	✓	✓	✓	✓	✓	✓	✓	✓
Universal adapter Ø 36 mm / 32 / 26	7013002	✓	✓	✓	✓	✓	✓	✓	✓	✓
Tube adapter Ø 38	7013046	✗	✓	✓	✓	✓	✓	✓	✓	✓
Reduction piece Ø 38 / 36	7013047	✗	✓	✓	✓	✓	✓	✓	✓	✓
Adapter hose/handle	7013049	✗	✓	✓	✓	✓	✓	✓	✓	✓
Adapter hose/tank	7013020	✓	✗	✗	✗	✗	✗	✗	✗	✗
Adapter hose/tank	7013050	✗	✓	✓	✓	✓	✓	✓	✓	✓









✓ = exists / ✗ = does not exist

wetCAT 116 E



Accessories wetCAT 116 E	PU	Art. no.	
 Paper filter bag	10	7010100	
 Pre-filter/Sanifilter complete kit		7013010	
 Pre-filter/Sanifilter*		7013011	
 Floor attachment with wet, dry and carpet insert		7013012	
 Carpet insert for floor attachment		7013013	
 Insert with rubber lip for floor attachment		7013014	
 Hard rubber insert for floor attachment		7013015	
 Combined attachment with fold-up brush*		7013016	
 Suction pipe Ø 36 alum./plast. 0.5 m*		7013017	
 Round brush*		7013018	

* included in standard scope of delivery























Accessories wetCAT 116 E	PU	Art. no.	
 Adapter hose/tank		7013020	
 Hose Ø 32 mm / Coil 20 m		7013021	
 Hose Ø 32 mm / 2.0 m with connections		7013022	
Polyester filters		7013023	
 Handle with loss-air control*		7013019	
 Furniture nozzle*		7013000	
 Flat nozzle Ø 36*		7013001	
 Universal adapter Ø 36 mm / 32 / 26		7013002	
 Filter bags - 3 l capacity	5	7010252	

For more information on the non-woven filter bags, see page 35

Accessories























wetCAT 133 IE wetCAT 133 IR



Accessories wetCAT 133 IE	PU	Art. no.		Accessories wetCAT 133 IE	PU	Art. no.	
 Carpet brush		7010000		 Angled piece for floor attachment		7013042	
 Paper filter bag	5	7010101		 Round brush*		7013043	
 Polycarbon pre-filter		7010102		 Flat nozzle Ø 38		7013044	
 Pre-filter/Sanifilter complete kit		7013070		 Suction pipe Ø 38 alum./plast. 0.5 m*		7013045	
 Pre-filter/Sanifilter*		7013071		 Tube adapter Ø 38		7013046	
 Filter bags - 15 l capacity	5	7010253		 Reduction piece Ø 38 / 36		7013047	
 Furniture nozzle		7013000		 Handle with loss-air control*		7013048	
 Flat nozzle Ø 36		7013001		 Adapter hose/handle		7013049	
 Universal adapter Ø 36 / 32 / 26		7013002		 Adapter hose/tank		7013050	
 Wet floor attachment*		7013040		 Hose Ø 38 mm / Coil 20 m		7013051	
 Dry floor attachment*		7013041		 Hose Ø 38 mm / 4.0 m with connections*		7013052	

wetCAT 137 E



Accessories wetCAT 137 E	PU	Art. no.		Accessories wetCAT 137 E	PU	Art. no.	
 Carpet brush		7010000		 Angled piece for floor attachment		7013042	
 Paper filter bag	5	7010101		 Round brush*		7013043	
 Polycarbon pre-filter		7010102		 Flat nozzle Ø 38		7013044	
 Pre-filter/Sanifilter complete kit		7013070		 Suction pipe Ø 38 alum./plast. 0.5 m*		7013045	
 Pre-filter/Sanifilter*		7013071		 Tube adapter Ø 38		7013046	
 Filter bags - 15 l capacity	5	7010253		 Reduction piece Ø 38 / 36		7013047	
 Furniture nozzle		7013000		 Handle with loss-air control*		7013048	
 Flat nozzle Ø 36		7013001		 Adapter hose/handle		7013049	
 Universal adapter Ø 36 / 32 / 26		7013002		 Adapter hose/tank		7013050	
 Wet floor attachment*		7013040		 Hose Ø 38 mm / Coil 20 m		7013051	
 Dry floor attachment*		7013041		 Hose Ø 38 mm / 4.0 m with connections*		7013052	























* included in standard scope of delivery

For more information on the non-woven filter bags, see page 35

Accessories

wetCAT 137 R





























Accessories wetCAT 137 R	PU	Art. no.		Accessories wetCAT 137 R	PU	Art. no.	
 Carpet brush		7010000		 Angled piece for floor attachment		7013042	
 Paper filter bag	5	7010101		 Round brush*		7013043	
 Polycarbon pre-filter		7010102		 Flat nozzle Ø 38		7013044	
 Pre-filter/Sanifilter complete kit		7013070		 Suction pipe Ø 38 alum./plast. 0.5 m*		7013045	
 Pre-filter/Sanifilter*		7013071		 Tube adapter Ø 38		7013046	
 Filter bags - 15 l capacity	5	7010253		 Reduction piece Ø 38 / 36		7013047	
 Furniture nozzle		7013000		 Handle with loss-air control*		7013048	
 Flat nozzle Ø 36		7013001		 Adapter hose/handle		7013049	
 Universal adapter Ø 36 / 32 / 26		7013002		 Adapter hose/tank		7013050	
 Wet floor attachment*		7013040		 Hose Ø 38 mm / Coil 20 m		7013051	
 Dry floor attachment*		7013041		 Hose Ø 38 mm / 4.0 m with connections*		7013052	

* included in standard scope of delivery

For more information on the non-woven filter bags, see page 35

**wetCAT 262 ET, wetCAT 262 IET,
 wetCAT 362 ET, wetCAT 362 IET**


Accessories wetCAT 262 ET, wetCAT 262 IET, wetCAT 362 ET, wetCAT 362 IET		PU	Art. no.	Accessories wetCAT 262 ET, wetCAT 262 IET, wetCAT 362 ET, wetCAT 362 IET		PU	Art. no.
	Paper filter bag	10	7010105		Round brush*		7013043
	Polycarbon pre-filter		7010106		Flat nozzle Ø 38		7013044
	Paper cartridge filter		7010107		Suction pipe Ø 38 alum./plast. 0.5 m*		7013045
	Poly-cartridge filter		7010108		Tube adapter Ø 38		7013046
	HEPA Cartridge filter		7010109		Reduction piece Ø 38 / 36*		7013047
	Fastening ring and seal for cartridge filter		7010110		Handle with loss-air control*		7013048
	Filter bags - 30 l capacity	5	7010254		Adapter hose/handle		7013049
	Carpet brush		7010000		Adapter hose/tank		7013050
	Furniture nozzle		7013000		Hose Ø 38 mm / Coil 20 m		7013051
	Flat nozzle Ø 36		7013001		Hose Ø 38 mm / 4.0 m with connections*		7013052
	Universal adapter Ø 36 / 32 / 26		7013002		Pre-filter/Sanifilter complete kit		7013080
	Wet floor attachment*		7013040		Pre-filter/Sanifilter*		7013081
	Dry floor attachment*		7013041		Fixed floor attachment		7013082
	Angled piece for floor attachment		7013042	For more information on the non-woven filter bags, see page 35 * included in standard scope of delivery			

Overview of accessories for dryCat series



Filter	Art. no.	dryCAT 137 RSC	dryCAT 133 IRSC	dryCAT 133 IRSCA	dryCAT 137 RSCM	dryCAT 133 IRSCM	dryCAT 262 RSCT	dryCAT 262 IRSCT	dryCAT 362 RSCT-3	dryCAT 362 IRSCT-3
Filter bags	7010253	✓	✓	✓	✓	✓	✗	✗	✗	✗
Filter bags	7010254	✗	✗	✗	✗	✗	✓	✓	✗	✗
HEPA Cartridge filter	7010200	✗	✗	✗	✗	✗	✗	✗	✓	✓
HEPA12 Cartridge filter	7010201	✗	✗	✗	✗	✗	✗	✗	✓	✓
HEPA13 Cartridge filter	7010202	✗	✗	✗	✗	✗	✗	✗	✓	✓
Poly-cartridge filter	7010203	✗	✗	✗	✗	✗	✗	✗	✓	✓
Polycarbon pre-filter cylindrical	7010204	✗	✗	✗	✗	✗	✗	✗	✓	✓
Polycarbon pre-filter conical	7010205	✗	✗	✗	✗	✗	✗	✗	✓	✓

Nozzles/Brushes/Adapters/Hoses	Art. no.	dryCAT 137 RSC	dryCAT 133 IRSC	dryCAT 133 IRSCA	dryCAT 137 RSCM	dryCAT 133 IRSCM	dryCAT 262 RSCT	dryCAT 262 IRSCT	dryCAT 362 RSCT-3	dryCAT 362 IRSCT-3
Antistatic hose and nozzle set	7010210	✓	✓	✓	✗	✗	✓	✓	✗	✗
Furniture nozzle	7013000	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flat nozzle Ø 36	7013001	✓	✓	✓	✓	✓	✓	✓	✓	✓
Universal adapter Ø 36 mm / 32 / 26	7013002	✓	✓	✓	✓	✓	✓	✓	✓	✓










✓ = exists / ✗ = does not exist

dryCAT 137 RSC, dryCAT 133 IRSC



dryCAT 133 IRSCA







Accessories dryCAT 137 RSC, dryCAT 133 IRSC		PU	Art. no.		Accessories dryCAT 133 IRSCA		PU	Art. no.	
	Antistatic hose and nozzle set		7010210			Antistatic hose and nozzle set		7010210	
	Filter bags - 15 l capacity	5	7010253			Filter bags - 15 l capacity	5	7010253	
	Furniture nozzle		7013000			Furniture nozzle		7013000	
	Flat nozzle Ø 36*		7013001			Flat nozzle Ø 36*		7013001	
	Universal adapter Ø 36 / 32 / 26		7013002			Universal adapter Ø 36 / 32 / 26		7013002	

* included in standard scope of delivery

For more information on the non-woven filter bags, see page 35






dryCAT 137 RSCM, dryCAT 133 IRSCM



Accessories dryCAT 137 RSCM, dryCAT 133 IRSCM		PU	Art. no.	
	Filter bags - 15 l capacity	5	7010253	
	Furniture nozzle		7013000	
	Flat nozzle Ø 36*		7013001	
	Universal adapter Ø 36 / 32 / 26		7013002	

dryCAT 262 RSCT, dryCAT 262 IRSCT



Accessories dryCAT 262 RSCT, dryCAT 262 IRSCT		PU	Art. no.	
	Antistatic hose and nozzle set		7010210	
	Filter bags - 30 l capacity	5	7010254	
	Furniture nozzle		7013000	
	Flat nozzle Ø 36*		7013001	
	Universal adapter Ø 36 / 32 / 26		7013002	

dryCAT 362 RSCT-3, dryCAT 362 IRSCT-3



Accessories dryCAT 362 RSCT-3, dryCAT 362 IRSCT-3		PU	Art. no.	
	HEPA Cartridge filter		7010200	
	HEPA12 Cartridge filter		7010201	
	HEPA13 Cartridge filter		7010202	
	Poly-cartridge filter		7010203	
	Polycarbon pre-filter cylindrical		7010204	
	Polycarbon pre-filter conical		7010205	
	Furniture nozzle		7013000	
	Flat nozzle Ø 36*		7013001	
	Universal adapter Ø 36 / 32 / 26		7013002	

For more information on the non-woven filter bags, see page 35

* included in standard scope of delivery

Wet/dry vacuum cleaners

Dry vacuum cleaner

Special vacuum cleaners

Accessories

Overview of accessories for flexCat















Filter	Art. no.	flexCAT 112 Q	flexCAT 16 H	flexCAT 116 PD	flexCAT 262 IEPD	flexCAT 290 EPT	flexCAT 390 EOT
Filter	7010250	✗	✓	✗	✗	✗	✗
Filter bags	7010251	✗	✓	✗	✗	✗	✗
Filter bags	7010252	✗	✗	✓	✗	✗	✗
Filter bags	7010254	✗	✗	✗	✓	✗	✗
Filter bags	7010255	✗	✗	✗	✗	✓	✓
Filter bag 700 MICRON	7013200	✗	✗	✗	✗	✓	✓
HEPA Cartridge filter	7010303	✓	✗	✗	✗	✗	✗
Paper filter bag (PU = 10)	7010100	✗	✗	✓	✗	✗	✗
Paper filter bag (PU = 5)	7010300	✓	✗	✗	✗	✗	✗
Polyester filters	7013023	✗	✗	✓	✗	✗	✗
Poly-cartridge filter	7010302	✓	✗	✗	✗	✗	✗
Poly-cartridge filter	7010314	✗	✗	✗	✗	✗	✓
Fabric filter bag	7010304	✓	✗	✗	✗	✗	✗
Pre-filter/Sanifilter	7013011	✗	✗	✓	✗	✗	✗
Pre-filter/Sanifilter complete kit	7013010	✗	✗	✓	✗	✗	✗
Nozzles & brushes	Art. no.	flexCAT 112 Q	flexCAT 16 H	flexCAT 116 PD	flexCAT 262 IEPD	flexCAT 290 EPT	flexCAT 390 EOT
Driven carpet brush	7010320	✗	✗	✗	✓	✗	✗
Floor brush wet	7010313	✗	✗	✗	✗	✗	✓
Floor attachment with wet, dry and carpet insert	7013012	✗	✗	✓	✗	✗	✗
Nozzle set	7010310	✗	✗	✗	✗	✗	✓
Insert with rubber lip for floor attachment	7013014	✗	✗	✓	✗	✗	✗
Flat nozzle & attachment brush	7013120	✗	✓	✗	✗	✗	✗
Flat nozzle Ø 36 mm	7013001	✗	✗	✓	✗	✗	✗
Flat nozzle Ø 36 mm	7013103	✓	✗	✗	✗	✗	✗
Flexible gap nozzle	7013131	✗	✓	✗	✗	✗	✗
Gap nozzle short 32 mm matt	7013132	✗	✓	✗	✗	✗	✗
Gap nozzle long 35 mm	7013133	✗	✓	✗	✗	✗	✗
Handle with loss-air control	7013105	✓	✗	✗	✗	✗	✗
Hard rubber insert for floor attachment	7013015	✗	✗	✓	✗	✗	✗
Combined nozzle DKS 306 32 mm	7013129	✗	✓	✗	✗	✗	✗
Combined attachment with fold-up brush	7013016	✗	✗	✓	✗	✗	✗
Combined attachment with fold-up brush	7013100	✓	✗	✗	✗	✗	✗
Furniture brush 35 mm	7013130	✗	✓	✗	✗	✗	✗
Parquet attachment D300 32 mm	7013128	✗	✓	✗	✗	✗	✗
Furniture nozzle	7013000	✗	✗	✓	✗	✗	✗
Furniture nozzle	7013102	✓	✗	✗	✗	✗	✗
Furniture nozzle 35 mm	7013136	✗	✓	✗	✗	✗	✗
Round brush	7013018	✗	✗	✓	✗	✗	✗
Round brush	7013104	✓	✗	✗	✗	✗	✗
Dust brush nylon 35 mm	7013135	✗	✓	✗	✗	✗	✗
Dust brush horse hair 32 mm	7013134	✗	✓	✗	✗	✗	✗
Carpet insert for floor attachment	7013013	✗	✗	✓	✗	✗	✗
Carpet brush	7010000	✗	✗	✗	✓	✗	✗
Turbo nozzle TK 370 32 mm	7013126	✗	✓	✗	✗	✗	✗
Chrome-plated flat nozzle	7010315	✗	✗	✗	✗	✗	✓
Adapters/Hoses/Tubes/Fasteners	Art. no.	flexCAT 112 Q	flexCAT 16 H	flexCAT 116 PD	flexCAT 262 IEPD	flexCAT 290 EPT	flexCAT 390 EOT
Adapter hose/tank	7013020	✗	✗	✓	✗	✗	✗
Adapter hose/tank	7013107	✓	✗	✗	✗	✗	✗
Anti-oil hose	7010311	✗	✗	✗	✗	✗	✓
Reducing sleeve with edge 35 mm – 32 mm	7013125	✗	✓	✗	✗	✗	✗
Suction pipe Ø 36 alum./plast. 0.5 m	7013017	✗	✗	✓	✗	✗	✗
Suction pipe Ø 36 alum./plast. 0.5 m	7013101	✓	✗	✗	✗	✗	✗
Hose with connection and handle	7013121	✗	✗	✓	✗	✗	✗
Hose Ø 32 mm / Coil 20 m	7013021	✗	✗	✓	✗	✗	✗
Hose Ø 32 mm / 2.0 m with connections	7013022	✗	✗	✓	✗	✗	✗
Hose Ø 36 mm / 2.0 m with connections	7013106	✓	✗	✗	✗	✗	✗
Hose Ø 38 mm / 4.0 m with connections	7013138	✗	✗	✗	✗	✗	✓
Shoulder strap	7013122	✗	✓	✗	✗	✗	✗
Telescopic tube plastic 32 mm	7013127	✗	✓	✗	✗	✗	✗
Telescopic suction tube	7010301	✓	✗	✗	✗	✗	✗
Universal adapter Ø 36 mm / 32 / 26	7013002	✗	✗	✓	✗	✗	✗
Chrome-plated suction pipe	7010312	✗	✗	✗	✗	✗	✓
Accessory holder	7013108	✓	✗	✗	✗	✗	✗

flexCAT 112 Q



flexCAT 16 H



Accessories flexCAT 112 Q	PU	Art. no.	
 Paper filter bag	5	7010300	
 Telescopic suction tube		7010301	
 Poly-cartridge filter		7010302	
 HEPA Cartridge filter		7010303	
 Fabric filter bag		7010304	
 Combined attachment with fold-up brush*		7013100	
 Suction pipe Ø 36 alum./plast. 0.5 m*		7013101	
 Furniture nozzle*		7013102	
 Flat nozzle Ø 36		7013103	
 Round brush*		7013104	
 Handle with loss-air control*		7013105	
 Hose Ø 36 mm / 2.0 m with connections*		7013106	
 Adapter hose/tank		7013107	
 Accessory holder		7013108	

* included in standard scope of delivery

Accessories flexCAT 16 H	PU	Art. no.	
 Filter*		7010250	
 Flat nozzle & attachment brush*		7013120	
 Hose with connection and handle*		7013121	
 Shoulder strap*		7013122	
 Reducing sleeve with edge 35 mm – 32 mm		7013125	
 Turbo nozzle TK 370 32 mm		7013126	
 Telescopic tube plastic 32 mm		7013127	
 Parquet attachment D300 32 mm		7013128	
 Combined nozzle DKS 306 32 mm		7013129	
 Furniture brush 35 mm		7013130	
 Flexible gap nozzle		7013131	
 Gap nozzle short 32 mm matt		7013132	
 Gap nozzle long 35 mm		7013133	
 Dust brush horse hair 32 mm		7013134	
 Dust brush nylon 35 mm		7013135	
 Furniture nozzle 35 mm		7013136	
 Filter bags - 2 l capacity	5	7010251	


















For more information on the non-woven filter bags, see page 35

Accessories

New

flexCAT 116 PD



Accessories flexCAT 116 PD	PU	Art. no.		Accessories flexCAT 116 PD	PU	Art. no.	
 Paper filter bag	10	7010100		 Hard rubber insert for floor attachment		7013015	
 Furniture nozzle*		7013000		 Combined attachment with fold-up brush*		7013016	
 Flat nozzle Ø 36*		7013001		 Suction pipe Ø 36 alum./plast. 0.5 m*		7013017	
 Universal adapter Ø 36 / 32 / 26		7013002		 Round brush*		7013018	
 Pre-filter/Sanifilter complete kit		7013010		 Adapter hose/tank		7013020	
 Pre-filter/Sanifilter*		7013011		 Hose Ø 32 mm / Coil 20 m		7013021	
 Floor attachment with wet, dry and carpet insert		7013012		 Hose Ø 32 mm / 2.0 m with connections		7013022	
 Carpet insert for floor attachment		7013013		Polyester filters		7013023	
 Insert with rubber lip for floor attachment		7013014		 Filter bags - 3 l capacity	5	7010252	

* included in standard scope of delivery

For more information on the non-woven filter bags, see page 35

Filter bag 700 Micron

- ▶ Reusable, flushable filter bag made of woven nylon fabric 0.7 mm
- ▶ Large opening with pull cord for easy emptying and flushing
- ▶ During wet vacuuming, large particles are filtered out of the fluid








flexCAT 262 IEPD



flexCAT 390 EOT





Accessories flexCAT 262 IEPD	PU	Art. no.	
 Carpet brush		7010000	
 Driven carpet brush		7010320	
 Filter bags - 30 l capacity	5	7010254	

Accessories flexCAT 390 EOT	PU	Art. no.	
 Filter bag 700 MICRON During vacuuming of liquids with metal chips, the chips are separately filtered and can be disposed of separately from the liquid		7013200	
 Filter bags - 42 l capacity	5	7010255	
 Nozzle set		7010310	
 Oil-resistant special suction hose*		7010311	
 Chrome-plated suction pipe*		7010312	
 Floor brush wet*		7010313	
 Poly-cartridge filter		7010314	
 Chrome-plated flat nozzle*		7010315	
 Hose 4 m Ø 38 mm with connections*		7013138	


flexCAT 290 EPT



Accessories flexCAT 290 EPT	PU	Art. no.	
 Filter bags - 42 l capacity	5	7010255	
 Filter bag 700 MICRON Protects the water pump against clogging, e.g., through wood, paper or foil		7013200	

* included in standard scope of delivery

Non-woven filter bags

Made in Germany 

The non-woven material offers a number of benefits compared with paper dust filter bags

The non-woven filter bags can hold twice or three times the amount of dust compared with legacy paper filters as they are not decomposed as quickly by fine dust.

Design:

- ▶ 4-ply micro non-woven
- ▶ Dust retention level tested as per DIN ISO
- ▶ TÜV approved.
- ▶ Extremely tear-resistant

- ▶ Mechanically robust
- ▶ Suitable for vacuuming dusts containing carbon black
- ▶ Dimensionally stable plastic flange (except filter bag for flexCAT 16H)



stürmer®

WELT DER MASCHINEN



optimum-maschinen.de



holzkraft.de



metallkraft.de



holzstar.de



schweisskraft.de



unicraft.de



aircraft-kompressoren.de



finikompressoren.de

Sales Germany:

CLEANCRAFT - Stürmer Maschinen GmbH
Dr.-Robert-Pfleger-Str. 26
96103 Hallstadt/Germany

Phone: +49 (0) 9 51 - 96 555 - 0
Fax: +49 (0) 9 51 - 96 555-55
email: info@cleancraft.de
Web: www.cleancraft.de

Sales Austria:

**AIRCRAFT Kompressorenbau und
Maschinengroßhandel GmbH**

Gewerbestraße Ost 6
4921 Hohenzell / Austria
Phone: +43 (0) 77 52 - 70 929 - 0
Fax: +43 (0) 77 52 / 70 929 - 99
Email: info@aircraft.at
Web: www.aircraft.at



Your specialist retailer:



- The publication of this catalogue renders all previous price lists invalid.
- Prices are recommended retail prices, subject to change, in €, plus statutory VAT, plus packaging, shipping, transportation, unloading, installation and training costs as applicable.
- We accept no liability for printing errors, mistakes or incorrect representation.
- Technical and visual changes reserved.
- Some illustrations show optional accessories.
- Delivery is effected solely on the basis of our terms of delivery and payment.
- All items are sold through specialist retailers.
- The goods shall remain our property until payment has been received in full.
- Our retention of title shall remain valid in case of sale to a third-party.
- Legal warranty conditions apply for businesses.
- Copying and reproduction in full or in part is subject to written approval by us.